

RAS SERIES

NOMINAL VOLTAGE (VDC)	COIL RESISTANCE (Ω) (+/- 10%)	POWER CONSUMPTION (W)	NOMINAL CURRENT (mA) (+/- 10%)	PULL IN VOLTAGE (VDC)	DROP OUT VOLTAGE (VDC)	MAX. ALLOWABLE VOLTAGE (VDC)
3V	25 Ω	0.36W	120 mA	75 % MAX.	10 % MIN.	130 %
5V	69 Ω		72 mA			
6V	100 Ω		60 mA			
9V	225 Ω		40 mA			
12V	400 Ω		30 mA			
18V	900 Ω		20 mA			
24V	1600 Ω		15 mA			
36V	3600 Ω	0.51W	10 mA	65 %	8 %	110 %
48V	4500 Ω		10.6 mA			
12V (M type)	225 Ω	0.64W	53.3 mA			

ORDER CODE

RAS-12-10-A

□: 1c
A: 1a
B: 1b
M: Automobile Relay

10: 10A 03: DC 3V
15: 15A 05: DC 5V
20: 20A(M type) 06: DC 6V
 09: DC 9V
COIL VOLTAGE 12: DC 12V
 18: DC 18V
 24: DC 24V
 36: DC 36V
TYPE 48: DC 48V



Main Features:

- UL, CUR & TUV safety approval.
- Heavy current up to 15 amps available, and special 20amps for using on the car.
- Epoxy seal type and flux free.
- Satisfying all requirements for use in car and household electric appliances.

COIL RATING (at 20°C)


PERFORMANCE (at initial value)

Item	Type	10A	15A	20A
Contact Resistance		50m Ω Max. (initial value)		
Operate Time		10msec Max.		
Release Time		5msec Max.		
Dielectric Strength		AC 1500V (1min) AC 750V (1min)		
between coil & contact between contact				
Insulation Resistance		100M Ω Min.(DC 500V)		
Operating Ambient Temperature		-30°C ~ +80°C		
Humidity		35 to 85% RH		
Vibration Resistance		10G (10~55Hz)(Dual amplitude : 1.5mm)		
Shock Resistance		10G		
Life Expectancy		10,000,000 ops. Min. (1800 ops./h) 100,000 ops. Min. (1200 ops./h)		
Mechanically Electrically				
Weight		9.5g (about)		


CONTACT RATING

Item	Type	10A	15A	20A
Rated Carrying Current		AC 120V 10A AC 250V 7A DC 24V 10A	AC 120V 15A AC 250V 10A DC 24V 15A	DC 14V 20A DC 30V 15A AC 120V 15A
Max. Allowable Current		15A	20A	20A
Max. Allowable Voltage		AC 240V DC 110V		
Max. Current (continual)		10A	15A	20A
Contact Material		Ag alloy		

DIMENSIONS (Unit : mm)

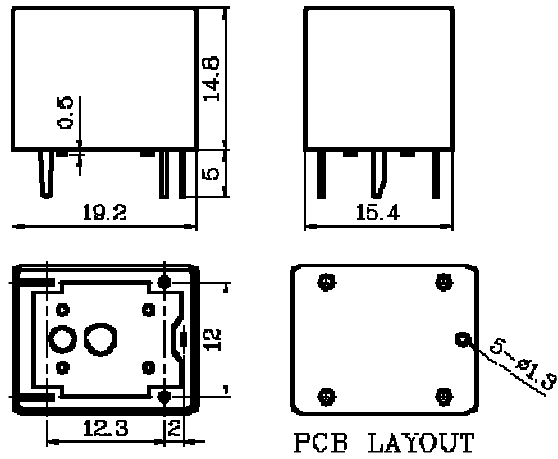

WIRING DIAGRAMS (Bottom View)

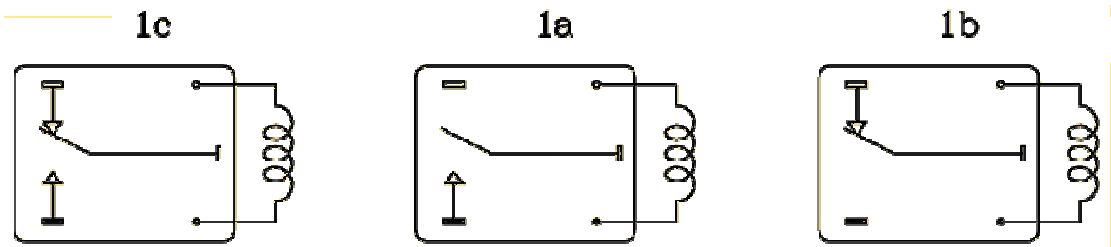

REFERENCE DATA

